


SCHULTZ QD COUPLINGS

Schultz Model 2000 Quick Disconnect (QD) couplings are available in stainless steel and aluminum. Both versions feature stainless steel poppets and springs along with Viton O rings. QD couplings are designed to handle pressures up to 1600 PSI. QD couplings are available with optional dust cap and retention chain. All QD couplings feature 1/4" pipe size passages. They accept existing manufacturer actuators and are configured in kits for fuel sampling operations.

1/4 " MALE QUICK DISCONNECT CUTAWAY

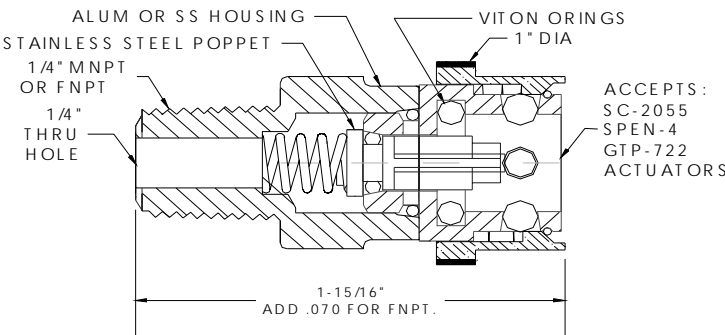

PART# AND ORDERING INFORMATION

DESCRIPTION :	
QD Kit 3 w/ 1/4 " MNPT Stainless w/ 90 deg elbow and 2 1/4 " probe.	SC-2003-0
QD Kit 5 w/ 1/4 " MNPT Stainless w/ 2 1/4 " integral probe.	SC-2005-0
QD Kit 5 w/ 1/4 " MNPT Stainless w/ 2 1/4 " probe.	SC-2005-1
ACCU-SAMPLE 1/4 " MNPT Stainless steel.	SC-2007-0
ACCU-SAMPLE 1/4 " MNPT Stainless w/ 2 1/4 "integral probe left flow.	SC-2007-1
ACCU-SAMPLE 1/4 " MNPT Stainless w/ 2 1/4 "integral probe right flow.	SC-2007-2
ACCU-SAMPLE 1/4 " MNPT Stainless w/ custom length integral probe.	SC-2007-3
ACCU-SAMPLE 1/4 " MNPT Stainless w/ 90 deg elbow and 2 1/4 " probe.	SC-2007-4
ACCU-SAMPLE 1/4 " MNPT Stainless w/ tee and Integral 2 1/4 " probe.	SC-2007-5
ACCU-SAMPLE 1/4 " MNPT Stainless w/ tee and 2 1/4 " probe.	SC-2007-6
QD Female 1/4 " NPT Alum	SC-2050-0
QD Male 1/4 " NPT Alum	SC-2050-1
QD Female 1/4 " NPT Stainless	SC-2051-0
QD Male 1/4 " NPT Stainless	SC-2051-1
PROBE 1/4 " NPT Hex 4" pipe.	SC-2052-0
PROBE 1/4 " NPT Hex custom length add length to part#	SC-2053-0
QD Dust cap and chain.	SC-2054-0
ACTUATOR Female 1/4 " NPT Stainless	SC-2055-0
ACTUATOR Male 1/4 " NPT Stainless.	SC-2055-1